



Blazer

Made from premium New Zealand lambswool, providing the highest quality raw material that is ideal for spinning, weaving and dyeing.





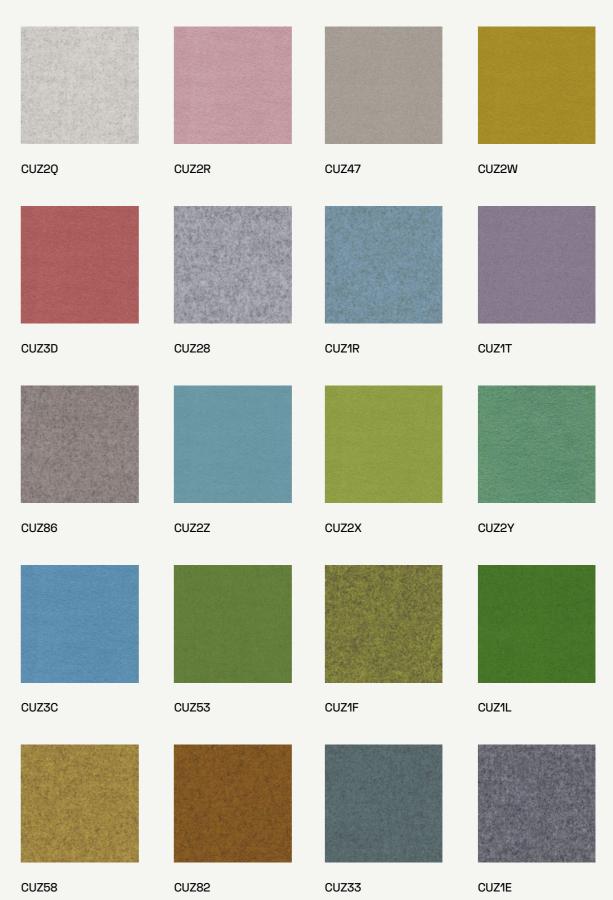



Main Line Flax

A new inherently flame retardant fabric from sustainable sources with strong, long and smooth fibres.





CAMIRA - MAIN LINE FLAX



CAMIRA - MAIN LINE FLAX





MLF24

PRODUCT SPECIFICATIONS

TROBOOT OF ESTITION TO SECTION TO	
Application	Task Seating / Soft Seating / Curtains
Composition	75% Virgin Wool, 25% Flax
Environmental	Certified to the EU Ecolabel Certified to Indoor Advantage™ "Gold" Rapidly renewable and compostable. Made from wool and bast fibre.
Width	140 cm minimum
Weight	437 g/m2 ±5%
Abrasion Resistance	Heavy duty / 10 year guarantee. Independently certified to ≥50,000 Martindale cycles
Flammability	EN 1021 - 1&2 (cigarette & match), BS 7176 Low Hazard, BS 5852 Ignition Source 5 BS 7176 Medium Hazard, NF D 60-013, ÖNORM B 3825 & A 3800-1 (58kg/m3 CMHR Foam) UNI 9175 Classe 1 IM, BS 5867-2: Type B Curtains & Drapes, IMO FTP Code (Part 8) The Furniture and Furnishing (Fire) (Safety) Regulations 1988 (Domestic Cigarette and Match)
Light Fastness	5 (ISO 105 - B02)
Fastness to Rubbing	Wet: 3, Dry: 4 (ISO 105 - X12)
Guarantee	10 Years

Vacuum regularly. Wipe with a damp cloth using soap and water or use proprietary upholstery shampoo.

For deeper cleaning use steam or professionally dry clean.

Vita


A leather-look vinyl with a subtle surface grain effect and full matt appearance.







CAMIRA - VITA

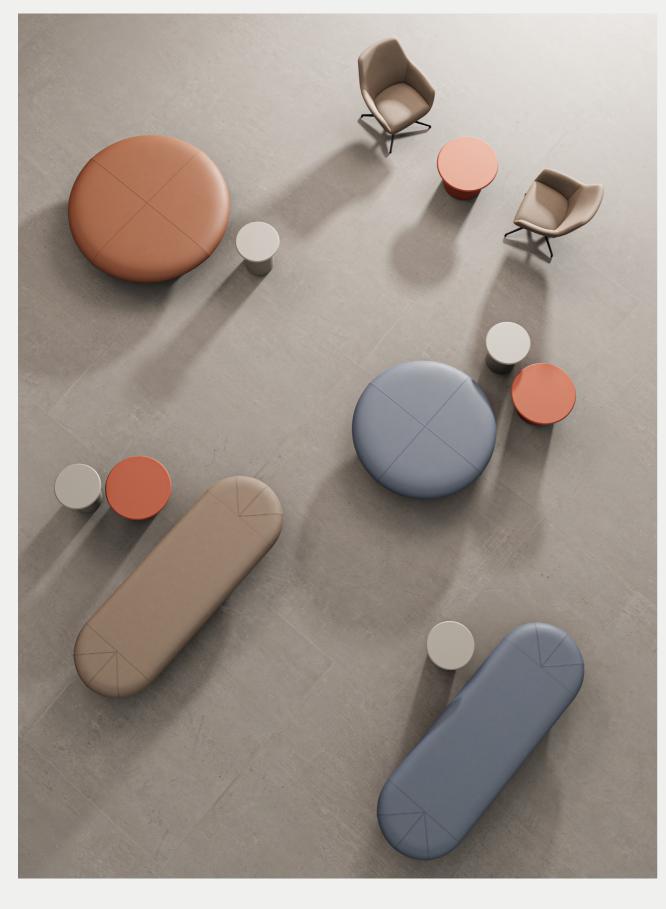

Colors may slightly vary due to photographic lighting sources or your monitor settings.

CAMIRA - VITA

PRODUCT SPECIFICATIONS

Task Seating / Soft Seating
Surface: 98% PVC, 2%. PU Substrate: 100% Cotton
140 cm minimum
850 g/m2 ±5%
Heavy duty / 5 year guarantee ISO 5470-2 100,000 rubs (Grade 2 minimum)
EN 1021 - 1&2 (cigarette & match), BS 7176 Low Hazard, BS 5852 Ignition Souce 5 BS 7176 Medium Hazard, BS 5852 Ignition Source 7 (with interliner), UNI 9175 Classe 1 IM The Furniture and Furnishing (Fire) (Safety) Regulations 1988 (Domestic Cigarette and Match) IMO FTP Code (Part 8)
ISO 7854 Method B 400,000 Flexing cycles / 5 year guarantee (full details available)
6 (ISO 105 - B02)
Wet: 4, Dry: 4 (ISO 105 - X12)
ISO 105 E03 colour change 4 for dilution factor 1:4 chlorine solution.
Hydrostatic head BS 3424 Part 26 > 1 metre
BS 3424 Part 19 no significant deterioration after 24 hrs
AATCC 147
5 Years

Cleaning
Vacuum regularly. Wipe with a damp cloth using soap and water or use proprietary upholstery shampoo.
For deeper cleaning use bleach or alcohol.